

**COLOR HARDENER** is an engineered blend of pigments, portland cement, and fine aggregates used to color the surface of newly placed concrete. Color Hardener is designed to work with imprinting tools to produce clear, sharp impressions that enhance the finished appearance of any new hardscape. Color Hardener can be used to create opaque finishes or as a complementary color to integrally colored concrete. Color Hardener is available in 42 standard colors and has an approximate coverage rate of 90-120 ft<sup>2</sup> per 60 lb. bucket. Coverage rate will vary depending on timing, color, and application technique.

**ANTIQUÉ RELEASE** is a hydrophobic powder that imparts color while serving as a bond breaker for stamping. It is made from a finely ground formula that creates beautifully antiqued concrete surfaces. During the stamping process, Antique Release is pressed into the concrete surface, creating a secondary coloring effect once washed off and sealed. Antique Release is available in 42 standard colors and has a coverage rate of 800-1000 ft<sup>2</sup> per 30 lb. bucket.

**ANTIQUÉ-IT** is a water-soluble antiquing agent designed to impart a secondary color or to highlight stamped concrete or textured overlays. Antique-It is easy to apply, dries fast, and provides a durable color that closely resembles the look of Antique Release. Use Antique-It on newly placed hardened concrete or to rejuvenate old stamped concrete. Antique-It is available in 42 standard colors and has a coverage rate of 2000-3000 ft<sup>2</sup> per 3 lb. bucket.

**CEM-COAT**<sup>®</sup> is an opaque, high-strength, UV-resistant, cement-based concrete coating. Cem-Coat is perfect for any unsealed concrete surface that needs to be colored or re-colored. Cem-Coat offers a resurfacing solution that is durable and provides consistent coloring. Whether a solid color, antiqued, or an artistic colored surface, Cem-Coat offers versatility in applications and final outcomes. Coverage Rate is 350-420 ft<sup>2</sup> per kit.

**OVERLAY LIQUID COLORANT** is an engineered blend of color admixtures designed for Brickform Stampable Overlay, Micro-Topping, and SM Professional Grade<sup>®</sup> product lines. Overlay Liquid Colorant is UV-resistant and manufactured to strict standards to ensure color uniformity and consistency. Overlay Liquid Colorants are non-hazardous water-based formulations, providing easy clean up and no-hassle shipping. Overlay Liquid Colorants come in cases of 6, 10 oz. bottles. Coverage Rate is one 10 oz. bottle per bag of overlay.

**TINTA' SEAL** is a color tint pack additive for solvent-based sealers. Tinta' Seal can enhance and correct the color of existing cementitious surfaces such as integral colored concrete, stamped concrete, overlays, or plain concrete. It is packaged in a 16 oz. container that is mixed onsite with a 5 gallon pail of either Gem-Seal, Poly-Seal, or Gem-Cure & Seal.


**WARRANTY** • These products are not intended for public use and are intended for use by licensed contractors and installers, experienced and trained in the use of these products. They are warranted to be of uniform quality, within manufacturing tolerances. The manufacturer has no control over the use of these products, therefore, no warranty, expressed or implied, is or can be made either as to the effects or results of such use. In any case, the manufacturer's obligations shall be limited to refunding the purchase price or replacing material proven to be defective. The end user shall be responsible for determining product's suitability and assumes all risks and liability. **CAUTIONS** • KEEP OUT OF REACH OF CHILDREN. Before using or handling, read the appropriate Technical Data Sheet, Safety Data Sheet and Warranty. DO NOT TAKE INTERNALLY. Avoid contact with skin and eyes. Use only with a NIOSH approved respirator when using these products. Installation guidelines available at [www.brickform.com](http://www.brickform.com).

*Brickform Color Hardener, Antique Release, Antique-It and Cem-Coat are available in 42 standard colors. See Brickform Standard Color Selection Guide for complete list of available Overlay Liquid Colors.*

*The colors shown are approximate representations only and Brickform does not guarantee that the final color will be an exact match. Application methods, jobsite conditions, texturing or finishing techniques such as brooming or troweling, the use of sealers, and slight color-drifts in raw materials are likely to produce variations of the colors. The sample chips represented on this color chart were produced to compare to concrete with a flat troweled finish sealed with Brickform solvent-based sealer.*

BRICKFORM<sup>®</sup>, A Division of Solomon Colors, Inc.  
4050 Color Plant Road, Springfield, IL 62702  
Customer Service: 800-483-9628  
[www.brickform.com](http://www.brickform.com)  
An Employee-Owned Company

Distributed by:

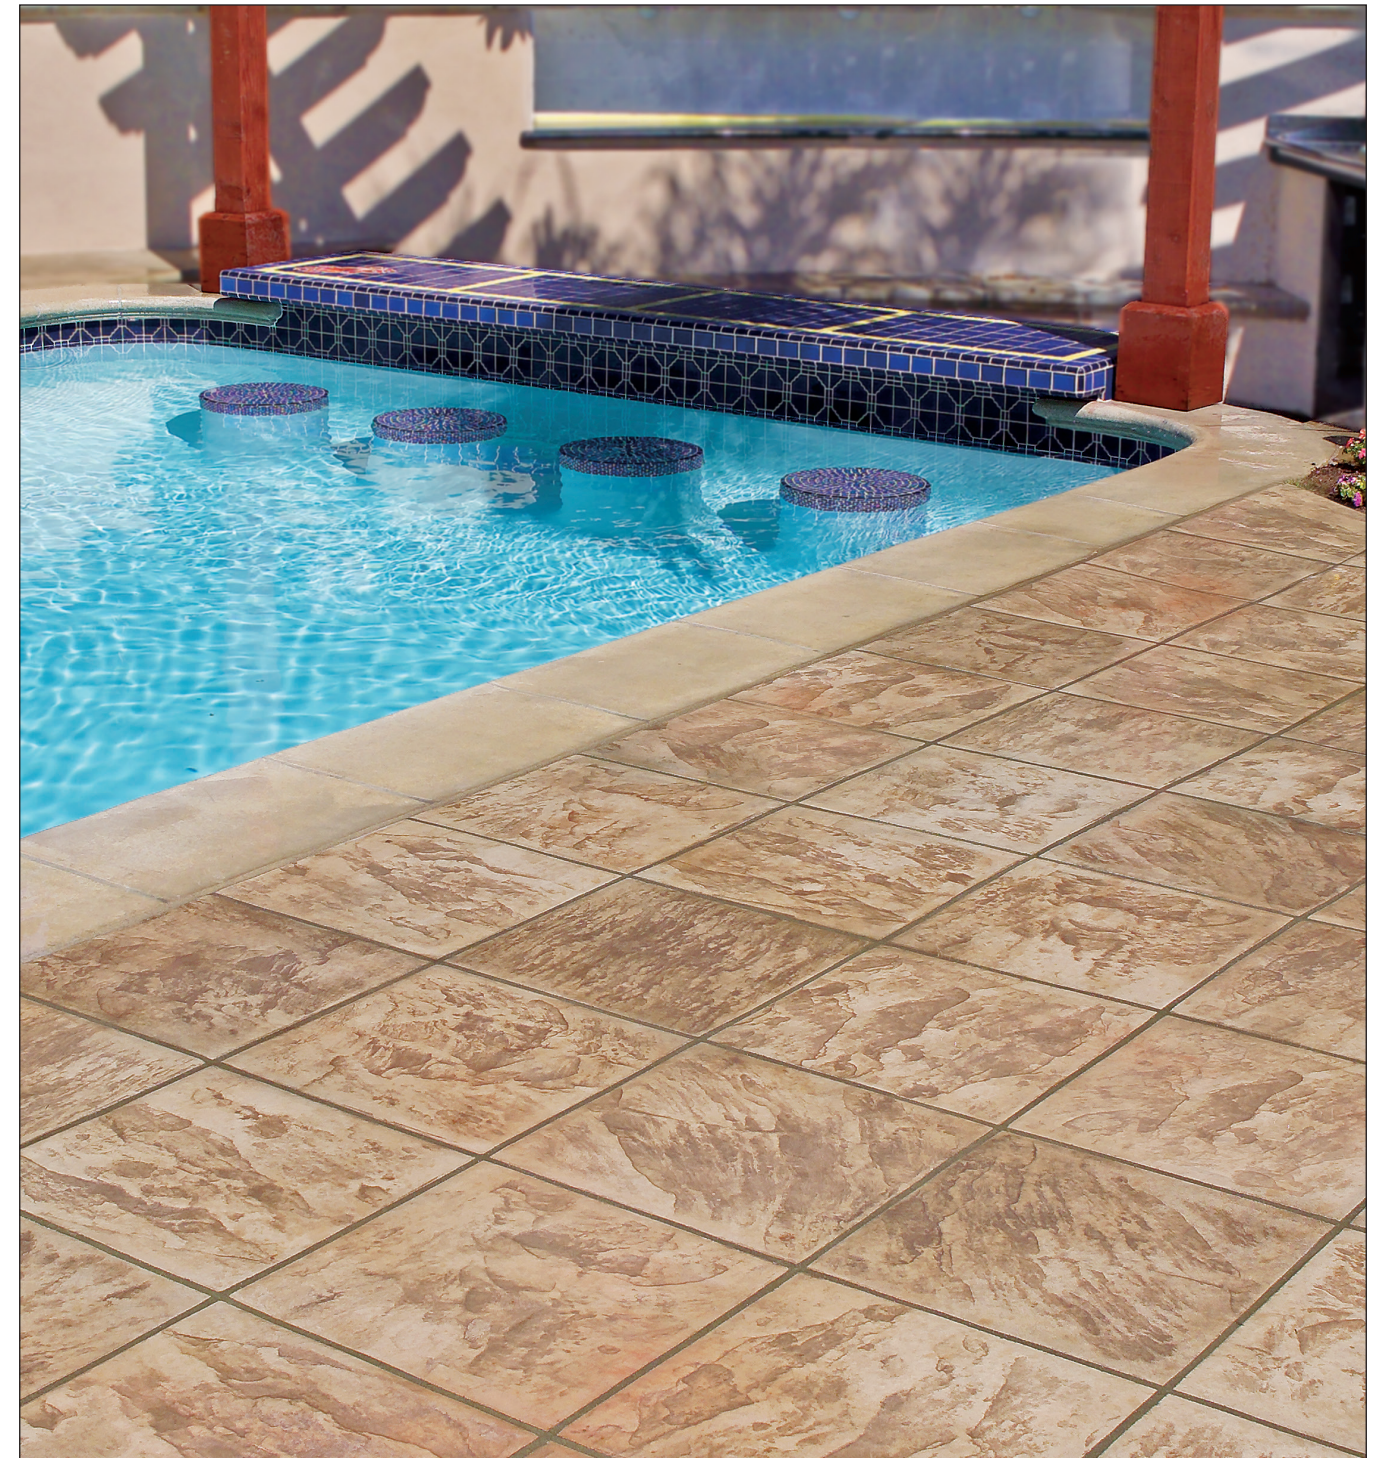

**Color Hardener  
Cem-Coat<sup>®</sup>**

**Antique Release  
Overlay Liquid Colorant**

**Antique-It  
Tinta' Seal**



# Color Selection Guide

Color Hardener  
Cem-Coat®

Antique Release  
Overlay Liquid Colorant


Antique-It  
Tinta' Seal




660 Pool Blue\*



1025 Copper Brown




1060 Pecan



1085 Saddle Brown



3100 Federal Yellow



1030 Ash White




250 Oyster White




1090 Sun Buff



1010 Smokey Beige



300 Nutmeg



625 Dover Blue



615 Stone Gray



600 Light Gray



200 Medium Gray



100 Dark Gray



735 Cappuccino



310 Cream Beige



815 French Gray



825 Slate Green



650 Smokey Blue\*



320 Golden Sandstone



1080 Adobe Buff



1070 Sandy Buff



325 Sandstone



350 Desert Tan



1050 Antique Cork



515 Sunbaked Clay



700 Terra Cotta



425 Autumn Brown



1055 Pecos Sand



1015 Blush Beige




375 Buff Tan



525 Dusty Rose



400 Chestnut



810 Walnut



1020 Antique Rose




1035 Summer Beige



1065 Quarry Red




500 Tile Red



550 Brick Red

Also available in: 900-Black, 1000-White\*



\*Brickform Overlay Liquid Colorant not available

[www.brickform.com](http://www.brickform.com)

The colors shown are approximate representations only and Brickform does not guarantee that the final color will be an exact match. Application methods, jobsite conditions, texturing or finishing techniques such as brooming or troweling, the use of sealers, and slight color-drifts in raw materials are likely to produce variations of the colors. The sample chips represented on this color chart were produced to compare to concrete with a flat troweled finish sealed with Brickform solvent-based sealer.